VENECIA®
BLINDS

50mm Wooden Venetian Blinds Installation

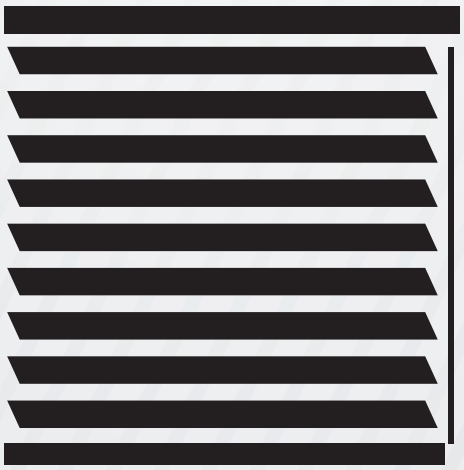

(Outside Mount)

50mm Wooden Venetian Blinds (Outside mount)

Tools needed

1. Measuring tape (metal)
2. Pencil (for marking)
3. Work gloves
4. Drill Machine
5. Drill Bit
6. Screws
7. Wall Plug (wall anchor)

General Safety Instructions

A safe product is one which under normal or reasonably foreseeable conditions of use including duration and, where applicable, putting into service, installation and maintenance requirements, does not present any risk or only the minimum risk compatible with the product use, consider to be acceptable and consistent with a high level protection for the safety and health of persons.

We recommend that manufacturers design to the standard and suppliers products complying with this standard.

The steps required are:

1. The attachment of a warning notice to the product.
2. The provision of a device to keep cords and chains or similar out of reach of children (with instruction for its proper use)

Consumers of your window coverings should be advised of the hazards and how taking appropriate precautions can prevent it.

Remedial advice to customers should be as follows:

1. Cords ending in a loop is particularly risky. Where possible operating cords, chains and tapes or similar should be kept short. Cut the cord to get rid of the loop and install tassels.

2. Cords should be out of the reach of children. Replace cords with curtain or blinds wands.

3. Never put a cot, bed, high chair or playpen near a window or patio door where a child can reach a curtain or blind cord.

4. Keep sofas, chairs, tables, shelves or bookcase away from windows to prevent children climbing up and reaching curtains or blind cords. People in charge of children are ultimately responsible for following the safety instruction provided by Sedar.

Components

1. Wooden valance
2. Valance clip
3. Tilter wheel
4. Tilter shaft
5. Box bracket
6. Cord lock
7. Head rail
8. Wooden slat
9. Ladder tape
10. Bottom rail
11. Ladder tape stopper
12. Cord
13. Tassel

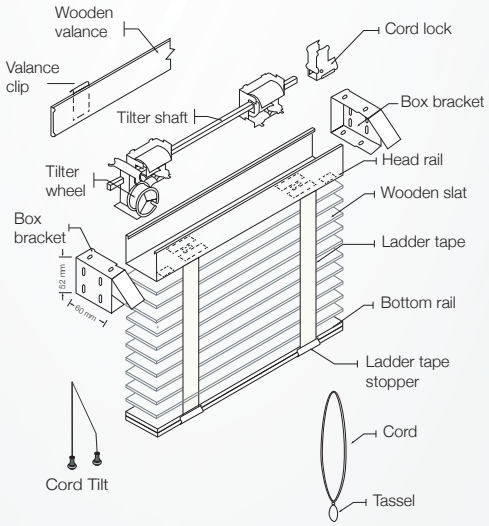

Step 1: Measure the wall for the first bracket position 10cm from the edge and 20cm height.

Step 2: Mark the position of the first bracket. Then, fix it using a drill or a screwdriver.

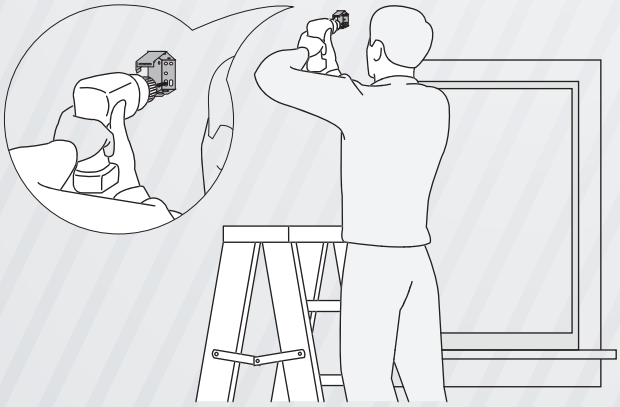

Step 3: Measure the wall for the middle bracket. Make sure the porition is exactly aligned to the first bracket.

Step 4: Mark the position of the middle bracket. Then, fix it using a drill or a screwdriver.

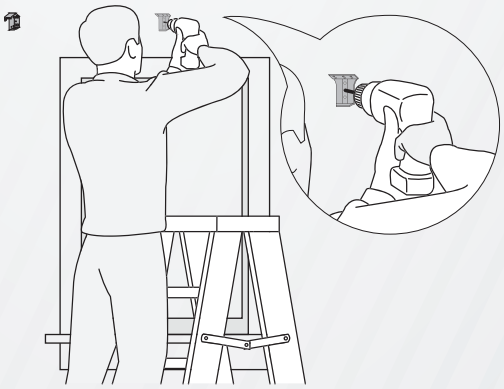

Step 5: Measure the position of the second bracket.

Step 6: Mark and fix the second bracket using a drill or screwdriver.

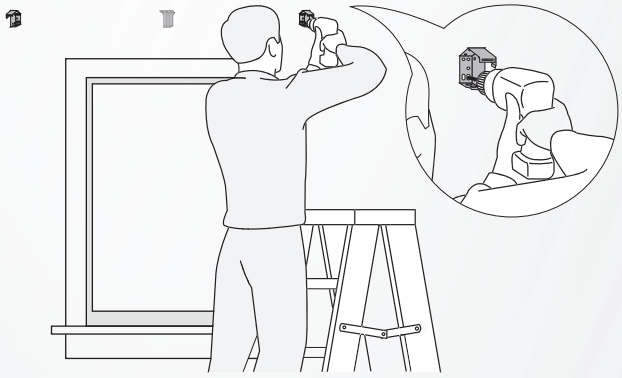

Step 7: Fix the blind and lock the brackets.

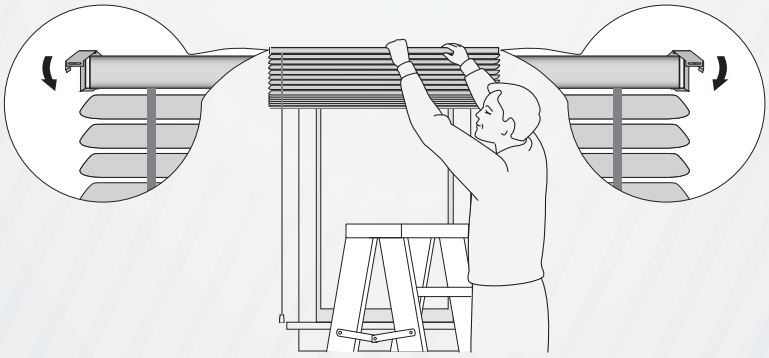

Step 8: Test the blind if it is fixed properly. Do not exert too much pressure.

Step 9: Check if the blind is working properly.

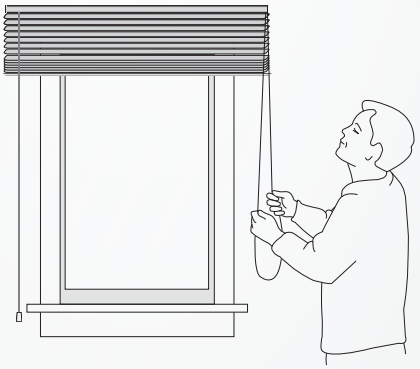

Tips

- For chain-operated blinds, please be attentive to children.
- Alignment of brackets should be exact to avoid damaging the product.